
RITE-TEMP MFG. MODEL: RTR-1203 EVAPORATOR

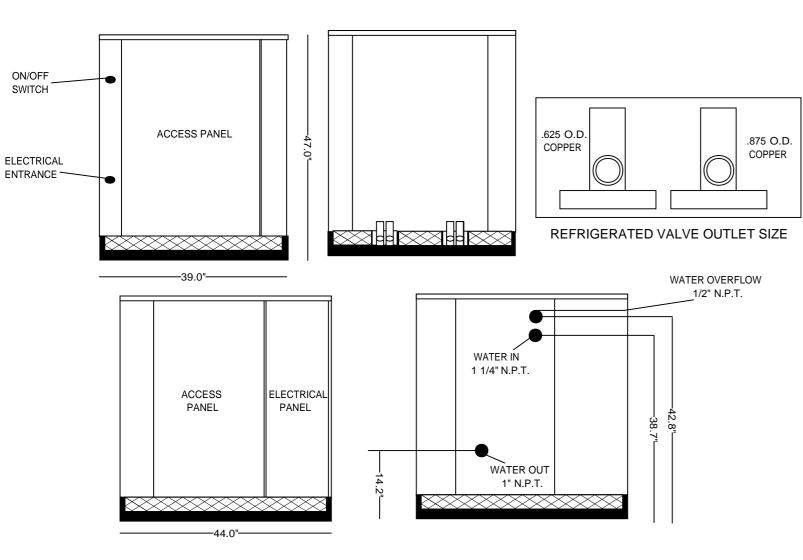

SPECIFICATIONS:

- 144,000 BTU/HR heat removal 95F degree ambient, 45F degree water out.
- Electrical: 208-230 / 60/3Ph., 24 volt electrical panel.
- Run Load 54 Amps.
- Minimum Circuit Ampacity: 59; Maximum Circuit Ampacity: 106.
- ETL/CSA Laboratory Approved: ETL # 63122 & CANCSA NO. 236.
- 40 gallon, 16 gage, 304 stainless steel closed evaporator tank with coil inside.
- 1 HP water pump: 25-30 GPM, 30-35 PSI.
- Low ambient start-up package (standard).
- R422D Refrigerant.
- Analog water temperature and pressure gauges.
- Air-cooled condenser.
- Cabinet: 18 and 20 GA Phos coat galvanized steel finished with polyester powder coat.
- Base frame: 1/8 inch angle and channel iron.
- Dual compressor design: (2) 6 ton Copeland Scroll (5 year warranty).
- Independent dual compressor operation for staged loads.
- Approximate crated weight: 1250 LBS.
- Condenser dimensions: 39" wide X 58" deep X 34" tall.
- Evaporator dimensions: 39" wide X 44" deep X 47" tall.

RITE-TEMP MFG.

MODEL: RTR-1203 CONDENSER

