
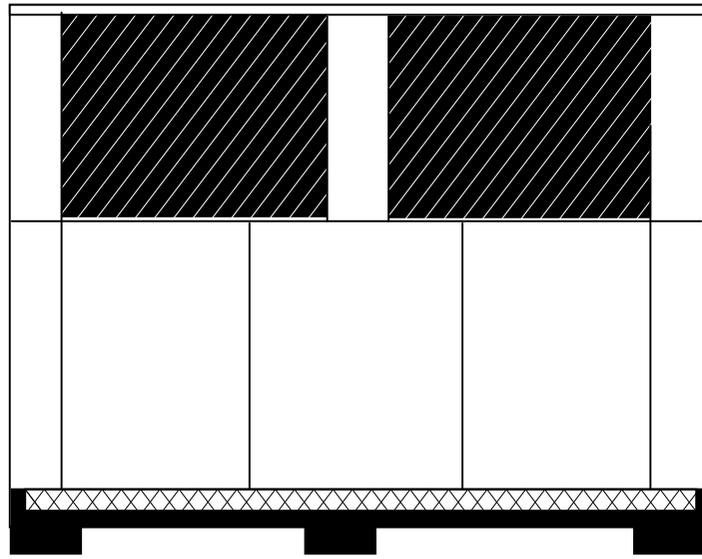


# RITE-TEMP MFG.

## MODEL: RTS-2404 SPEC

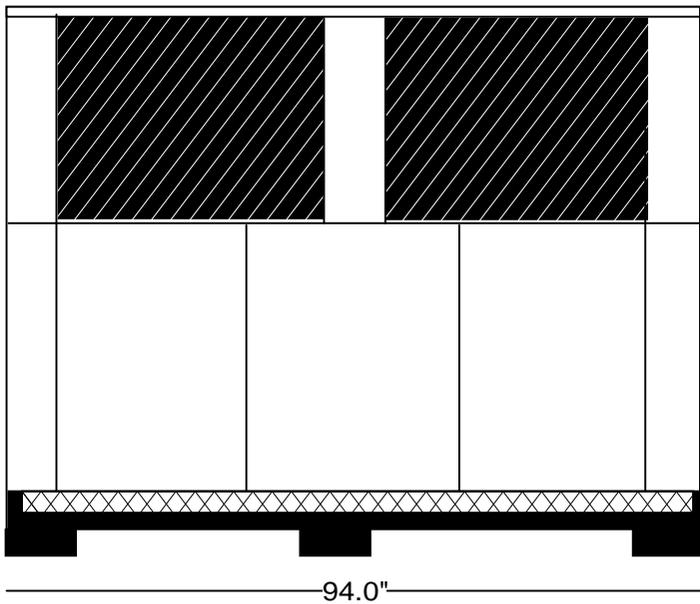

### SPECIFICATIONS:

- 288,000 BTU/HR heat removal - 95F degree ambient, 45F degree water out.
- Electrical: 460 / 60HZ / 3 PH 24 volt electrical panel.
- Run Load: 47.55 Amps.
- Minimum Circuit Ampacity: 50; Maximum Circuit Ampacity: 90.
- ETL/CSA Laboratory Approved: ETL # 63122 & CANCSA NO. 236
- (2) 40 gallon, 16 gage, 304 stainless steel closed evaporator tank with coil inside.
- 1.5 HP water pump: 30 - 40 GPM, 35 - 45 PSI.
- Low ambient start-up package (standard).
- R422D Refrigerant.
- Analog water temperature and pressure gauges.
- Air-cooled condenser.
- Cabinet: 18 and 20 gage Phos coat galvanized steel finished with polyester powder coat.
- Base frame: 1/8 - inch angle & channel iron.
- Multi-compressor design: (4) 6 ton Copeland Scroll (5 - year warranty).
- Independent dual compressor operation for staged loads.
- Approximate crated weight: 2600 LBS.
- Physical dimensions: 74" wide, 94" long, and 74" tall.