


RITE-TEMP MFG.

MODEL: DCS12 - 230

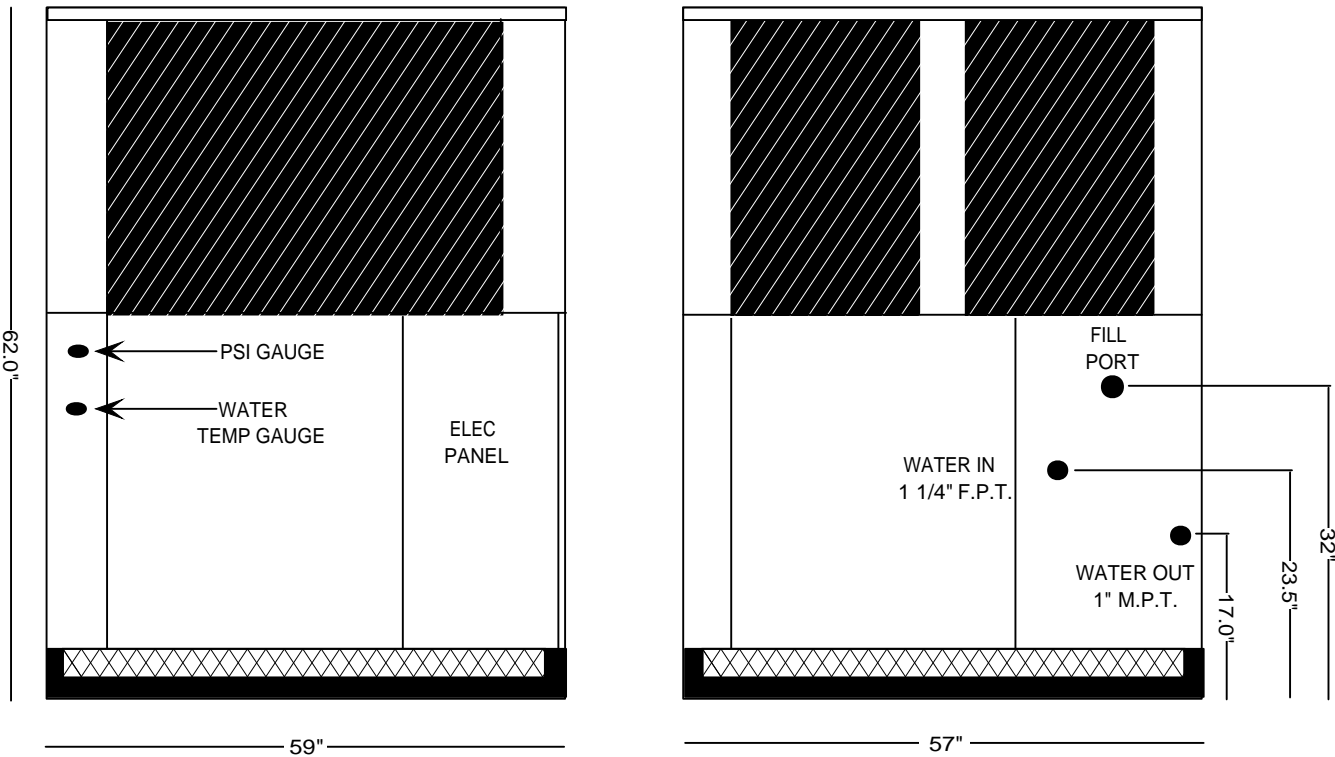

SPECIFICATIONS:

- 144,000 BTU/HR heat removal - 95F degree ambient, 45F degree water out.
- Electrical: 208-230 / 60HZ / 3 PH 24 volt electrical panel.
- Run Load: 54 Amps.
- Minimum Circuit Ampacity: 59; Maximum Circuit Ampacity: 106.
- 105 gallon, 16 gage, 304 stainless steel open evaporator tank with coil inside.
- 1 HP water pump: 25 - 30 GPM, 30 - 35 PSI.
- Low ambient fan cycling control.
- R422D Refrigerant.
- Analog water temperature and pressure gauge.
- Air-cooled condenser.
- Cabinet: 18 and 20 GA galvanized steel finish; powder coat additional cost.
- Base frame: 1/8 - inch angle & channel iron.
- Dual compressor design: (2) 6 ton Copeland Scroll (5 - year warranty).
- Independent dual compressor operation for staged loads.
- Water level sight glass.
- Approximate dry weight: 920 LBS.
- Physical dimensions: 59" wide, 57" long, and 62" tall.
- ETL/CSA Laboratory Approved: ETL # 63122 & CANCSA NO. 236

NOT TO SCALE

Information provided is subject to change